

PosiTector® **DPM** Probe Order Guide


Probe Style	DPM	DPMS	DPMA	DPMD
Comparison Chart				
Order Code	PRBDPM	PRBDPMS	PRBDPMA	PRBDPMD
Surface Temperature	•	•	•	
Air Temperature	•	•	•	•
Wet Bulb Temperature*	•	•	•	•
Relative Humidity	•	•	•	•
Dew Point Temperature	•	•	•	•
Surface Temperature minus Dew Point Temperature	•	•	•	
Wind Speed			•	

* Wet Bulb Temperature displayed/recorded on PosiTector Advanced (3) models only

Probe Details

Integral Probe with Wind Speed Sensor (DPMA)

- Includes the ambient temperature, surface temperature, and humidity sensors from PosiTector DPM Integral Probe plus a hot wire anemometer
- Anemometer mode measures air temperature, relative humidity and wind speed
- Auto-rotating display for inverted use
- **Wind Speed Range:** 0-20 m/s, 0-44 mph, 0-65 ft/s, 0-3900 ft/m, 0-72 km/h, 0-38 knots
- **Wind Speed Accuracy:** $\pm 3\%$ Full Scale

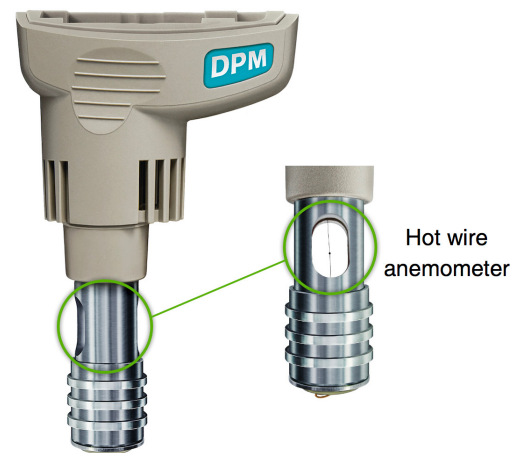

DeFelsko®
The Measure of Quality

DeFelsko Corporation 800 Proctor Ave., Ogdensburg, New York 13669-2205 USA
Toll Free 1-800-448-3835 • Tel: +1-315-393-4450 • Fax: +1-315-393-8471
techsale@defelsko.com • www.defelsko.com

© DeFelsko Corporation USA 2017. All Rights Reserved. Technical Data subject to change without notice. • DPM-PRB1711


Made in U.S.A.